



Main

Range of product	Modicon Quantum automation platform
Product or component type	AC discrete output modules
Discrete output number	16

Company: Joyoung International Trading Co., Limited
Attn: Smiling
Mobile/WhatsApp/Wechat: +86 18050035902
Email: info@htechplc.com
Website: <https://www.joyoungintl.com/>

Complementary

Discrete output type	Isolated
Group of channels	16 groups of 1 channel
Supply frequency	47...63 Hz
Voltage drop	1.5 V
Discrete output voltage	20...253 V AC
Addressing requirement	1 output word
Absolute maximum output	400 Vrms 1 cycle AC 300 Vrms for 10 s AC
Minimum load	5 A
Minimum load current	4 A rms 24...115 V per output 3 A rms 200...230 V per output 4 A rms four contiguous output 2.5 mA rms 230 Vrms off state leakage per output 2 mA rms 115 Vrms off state leakage per output 16 A rms per module 1 mA rms 48 Vrms off state leakage per output 1 mA rms 24 Vrms off state leakage per output
Surge current	<= 30 A during 1 cycle per point <= 20 A during 2 cycles per point <= 10 A during 3 cycles per point
DV/Dt	400 V/ms
Response time	<= 0.5 ms at state 1 to state 0 <= 0.5 ms at state 0 to state 1
Protection type	Internal by RC filter
Power dissipation	1.85 + (1.1 V x total module load current)
Associated fuse rating	5 A
Marking	CE
Local signalling	16 LEDs green input status 1 LED red external fault detected (F) 1 LED green bus communication is present (Active)
Bus current requirement	350 mA
Module format	Standard
Product weight	0.485 kg

Environment

Product certifications	CUL FM Class 1 Division 2
Standards	CSA C22.2 No 142 UL 508
Resistance to electrostatic discharge	8 kV on air conforming to IEC 801-2 4 kV contact conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS	Compliant - since 0936 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Period	18 months
--------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

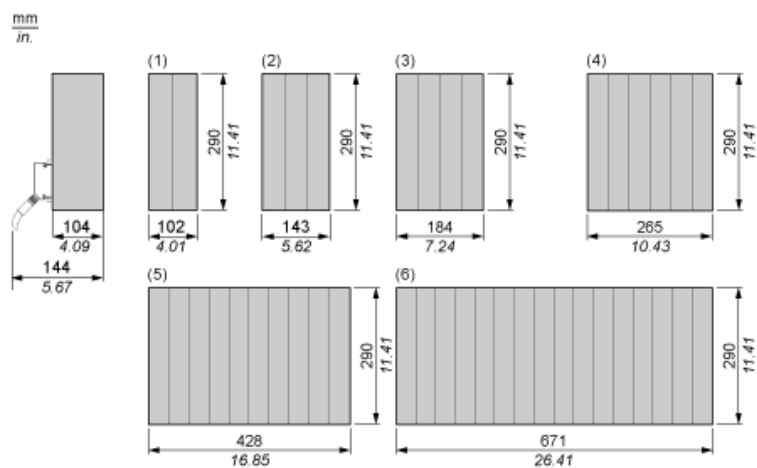

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24...230 Vac Discrete Output Module

Wiring Diagram

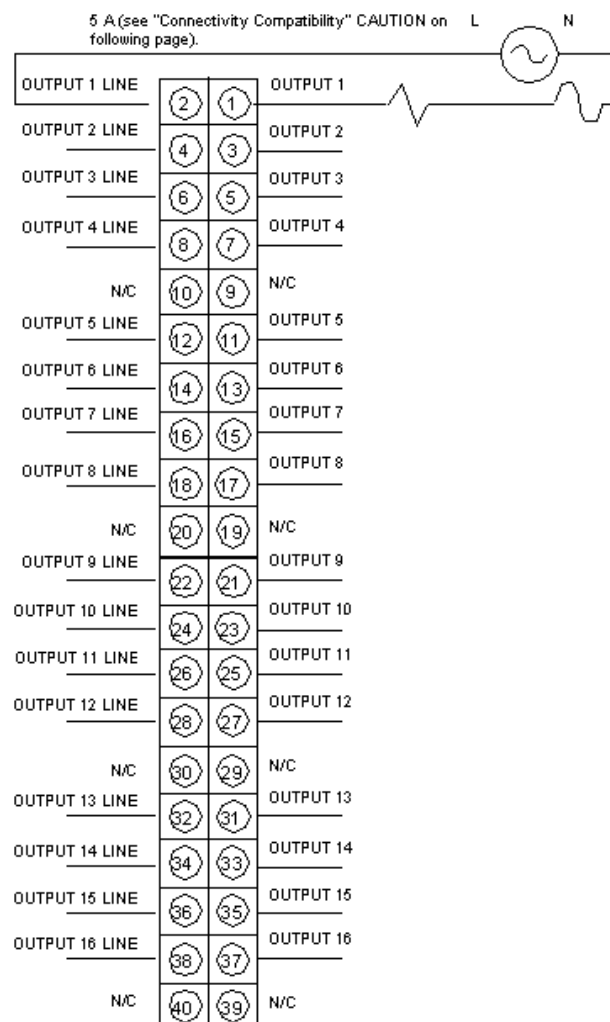

N/C Not Connected